


A3AB Series

3 Socket MIL-Style, Polycarbonate Molded Connector, Permanent Mount, 250 °F (121 °C) Max Temp



Product Features

- ▶ 3 Socket Connection for use with CTC Biaxial AC119-1D & BSFA333-IV sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

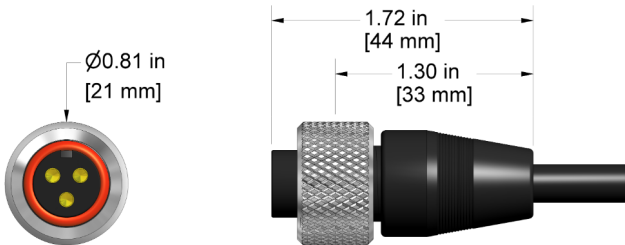

Specifications

Application	Permanent Installation
Max Temperature	250°F (121°C)
Shell Material	Polycarbonate Molded
Rating	IP68
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

Stock Product