


## D3C Series

3 Socket MIL-Spec Connector with Custom Molded Polyurethane  
Strain Relief, Portable Measurement, 250 °F (121 °C) Max Temp



### Product Features

- ▶ TNC Connector
- ▶ Epoxied
- ▶ IP66 Rated

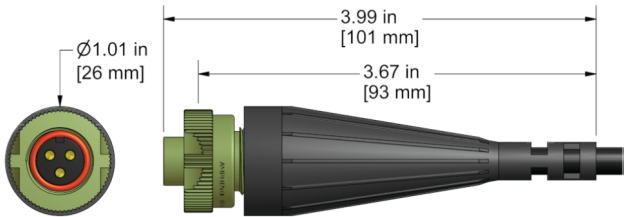

### Specifications

Application	Portable Measurements
Max Temperature	250°F (121°C)
Connector Type	3 Socket MIL-Spec
Pin-Out	A = Signal (+)
	B = Common (-)
	C = Signal (+)

Built to Order