


## J2A Series

2 Socket Mini-MIL Connector for CTC Miniature Industrial 2 Pin Accelerometers, Polycarbonate Molded, 250 °F (121 °C) Max Temp



### Product Features

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

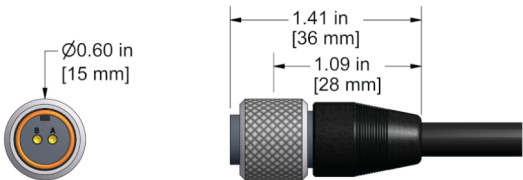

### Specifications

|                           |  |
|---------------------------|--|
| Application               | Permanent Mount                                    |
| Max Temperature           | 250° F (121° C)                                    |
| Connector Type            | 2 Socket Mini-MIL                                  |
| Shell Material            | Polycarbonate Molded                               |
| Connector Insert Material | Polycarbonate                                      |
| Rating                    | IP68   |
| Pin-Out                   | A = Signal (+) CTC Red<br>B = Common (-) CTC Black |

Built to Order