

J4AG Series


4 Socket Mini-MIL Connector with Grounded Backshell,
Polycarbonate Molded, Permanent Measrements, 250 °F (121 °C)
Max Temp



Product Features

Grounded Backshell is ideal for use with
Intrinsically Safe Applications

- ▶ 4 Socket Mini-MIL Connection for use with
CTC Triaxial Sensors
- ▶ Designed to Withstand a Wide Variety of
Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added
Durability & Corrosion Resistance

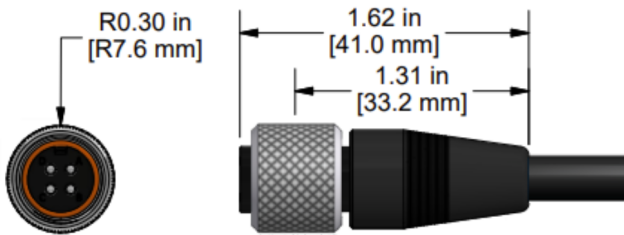

Specifications

Application	Permanent Mount
Max Temperature	250° F (121° C)
Connector Type	4 Socket Mini-MIL
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket A = Ch. Y (+), Red Conductor Socket B = Ch. X (+), Green Conductor Socket C = Ch. Z (+), White Conductor Socket D = Common (-), Black Conductor

Built to Order