

## M3C2 Series


Commtest Compatible, 5 Socket M12, Polyurethane Molded Connector with Alternative Pinout, Single Channel Acceleration Tachometer Input, with 3 Live Sockets



### Product Features

#### Commtest Compatible (Replaces C478)

- ▶ 5 Socket M12 Connection with 3 Live Sockets, for use with CTC Dual Output, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

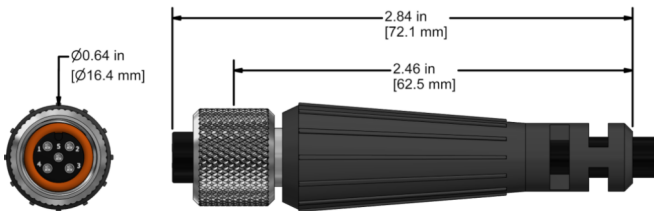

### Specifications

Application	Portable Measurements
Max Temperature	250° F (121° C)
Connector Type	5 Socket M12 Connector
Strain Relief	Rubber Bending
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP68
Pin-Out	Pin 1 Shield/Drain Pin 3 Tachometer/Power (+) Pin 4 Common (-)

Built to Order