


## M4TR4 Series

5 Socket M12, Polycarbonate Molded Connector, for use with 4 Wire  
RTD Systems, Permanent Mount, 250 °F (121 °C)



### Product Features

- ▶ 5 Socket M12 Connection with 4 Live Sockets, for use with CTC TR102 & TR104 RTD Sensors & 4 Wire RTD Systems
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

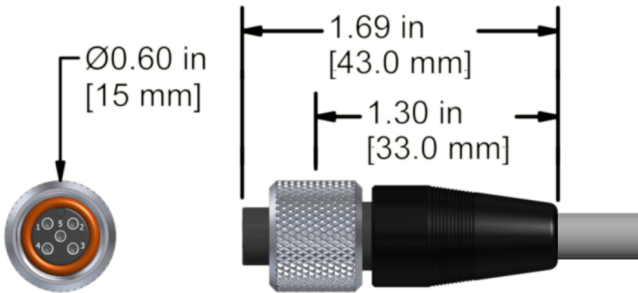

### Specifications

|                           |  |
|---------------------------|--|
| Application               | Permanent Measurement  |
| Max Temperature           | 250°F (121°C)  |
| Connector Type            | 5 Socket M12   |
| Shell Material            | Polycarbonate  |
| Connector Insert Material | Polycarbonate  |
| Rating                    | IP68   |
| Pin-Out                   | 1 = Signal (+) (Red)<br>2 = Common (-) (Black)<br>3 = RTD (L1,L2) (Green & White)<br>4 = RTD (L3,L4) (Blue, Brown) |

Built to Order