Q2N Series




2 Socket MIL-Style Connector with Grounded Backshell for Class I, Division 2 Locations, Nylon Molded, Permanent Measurements, 250 °F (121 °C) Max Temp



Product Features

Grounded Locking Ring for Class 1, Division 2 Installations

- 2 Socket Connection for use with CTC Standard Size, Single Axis Sensors
- Designed to Withstand a Wide Variety of Industrial Applications
- 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

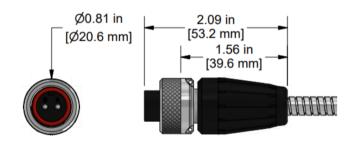

Specifications	
Application	Permanent Mount
Max Temperature	250° F (121°C)
Connector Type	2 Socket MIL-Style
Shell Material	Nylon
Connector Insert Material	Nylon
Rating	IP68
Pin-Out	A = Signal (+)
	B = Common (-)

Built to Order