



## Q3A Series

3 Socket MIL-Style Connector with Grounded Backshell for Class I, Division 2 Locations, Polycarbonate Molded, Permanent Measurements, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE



### Product Features

#### Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 3 Socket Connection for use with CTC Dual Output Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

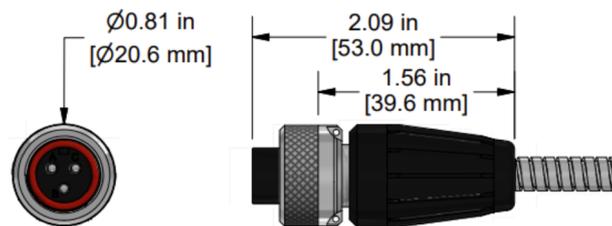

### Specifications

|                           |  |
|---------------------------|--|
| Application               | Permanent Mount                                    |
| Max Temperature           | 250° F (121°C)                                     |
| Connector Type            | 3 Socket MIL-Style                                 |
| Shell Material            | Polycarbonate                                      |
| Connector Insert Material | Polycarbonate                                      |
| Rating                    | IP68   |
| Pin-Out                   | A = Signal (+)<br>B = Common (-)<br>C = Signal (+) |

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900